

COMMERCIAL POOL HEATING

ELECTROHEAT PRO SERIES HEAT PUMP

Electr  Heat PRO


www.waterco.com.my

WATERCO
water, the liquid of life

Air source heat pump is the innovative heating equipment, which emphasizes on conservation in energy generation and environmental friendly technology. It is a highly efficient machinery in absorbing and transferring energy.

Its operation principle is based on the Reversed Carnot Cycle. By continuously absorbing the surrounding air, the Electroheat Pro Heat Pump is able to conduct heating at a fast rate while ensuring energy conservation and environmental-friendliness.


The high efficiency of Electroheat Pro Heat Pump is coupled with low operating cost. Its power consumption is only a quarter to that of electrical water heater.

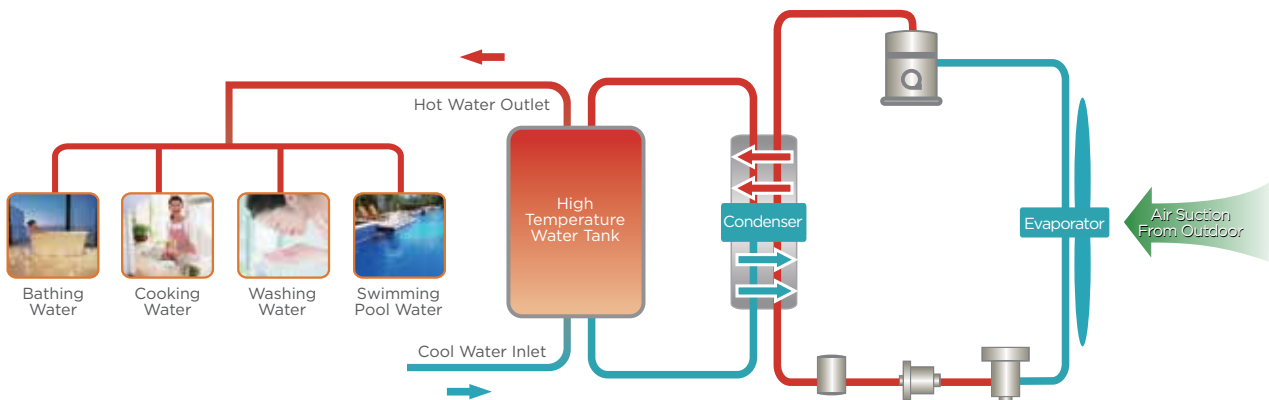

Electr Heat PRO 110

The **Electroheat PRO 110** heat pump has been designed to deliver efficient cost effective large pool heating in an easy to operate and install package.

- Titanium twisted coil exchangers for maximum heat transfer
- Blue fin dipped evaporators for enhanced heat absorption
- Twin high performance 12 HP scroll compressors
- Twin fans for maximum airflow
- Automatic hot gas de-icing for cold climates
- Easy to connect single in / out 80mm water connections
- Easy cable entry and electrical connection access
- Integral flow switch protecting equipment from operation when no flow is detected
- Noise emission: 58 dBA@ 3 metres



Aluminium Evaporator



Electronically controlled temperature



Scroll Compressors



Titanium heat exchangers



R410A Refrigerant



Energy-saving heating solution




Delayed compressor operation

Specifications	
Model Number	PRO110
Nominal Heating Cooling Capacity*	
Power Output Heat (27/27/80)	110 kW (376,000 BTU)
Power Output Heat (24/27/70)	105 kW (358,000 BTU)
Power Output Heat (15/27/70)	85 kW (290,500 BTU)
Power Output Heat (-5/27/63)	46 kW (157,900 BTU)
Power Output Cool (35/27/70)	60 kW (205,800 BTU)
Coefficient of Performance@27/27/80 (COP)	5.36
Compressor	(2 x) 12 HP
Water Flow & Plumbing Characteristics	
Water Bypass Type	Ext. field install
Min/Max Water Flow Rate (LPM)	650 - 750
Min/Max Water Inlet Temperature (°C)	14 - 40
Plumbing Connection Size (Slip) (mm)	80
Electrical Characteristics	
50Hz Dual Rated Supply Voltage (VAC)	380 - 415
Supply Voltage Phase	3
Max HACR Breaker or Fuse (AMP)	60
Average unit input current (AMP)	40
Maximum unit input current (AMP)	54
Normal power consumption (kW)	16.6
Max. Fan Speed (RPM)	900
Fan Motor	Axial
Fan Full Load Amp (FLA) each	1.4
Air Flow (CFM) each	9500/ 5613
Fan Diameter (mm)	630
Min/Max Air Inlet Temperature (°C)	>0/ 40
Refrigerant Characteristics	
Refrigerant Type	R-410A
Initial Factory Refrigerant Charge (kg)	(2 x) 5.5
Evaporator	Hydrophilic aluminium
Heat Exchanger	Titanium in PVC
Expansion system	(2 x) Expansion valve
Physical Characteristics	
Cabinet Construction	Powder coat steel
Colour	Black
Weight (kg)	530
Dimensions (W x L x H) (mm)	900 x 2000 x 1880
Noise Emission Characteristics	
Noise Emission (dBA)	58@3 m

*(27/27/80) = Air Temp: 27°C/ Water Temp 27 °C/ Humidity 80%

Dimensions

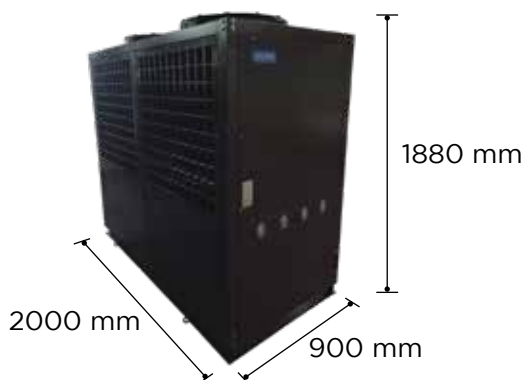


Clearance



Electr Heat PRO 150 & 250

The new generation **Electroheat PRO 150 and 250** series of heat pumps is the latest advancement in commercial size swimming pool heating. The heat pumps have been designed to deliver efficient and cost effective large pool heating in an easy to operate and install package.

- Hydrophilic aluminium evaporator
- Electronically controlled temperature management
- Hermetic scroll compressors
- Titanium heat exchangers
- R410A Refrigerant
- Energy-saving heating solution
- Delayed compressor operation as safety feature



Aluminium Evaporator



Electronically controlled temperature



Scroll Compressors



Titanium heat exchangers



R410A Refrigerant





Energy-saving heating solution



Delayed compressor operation

Clearance

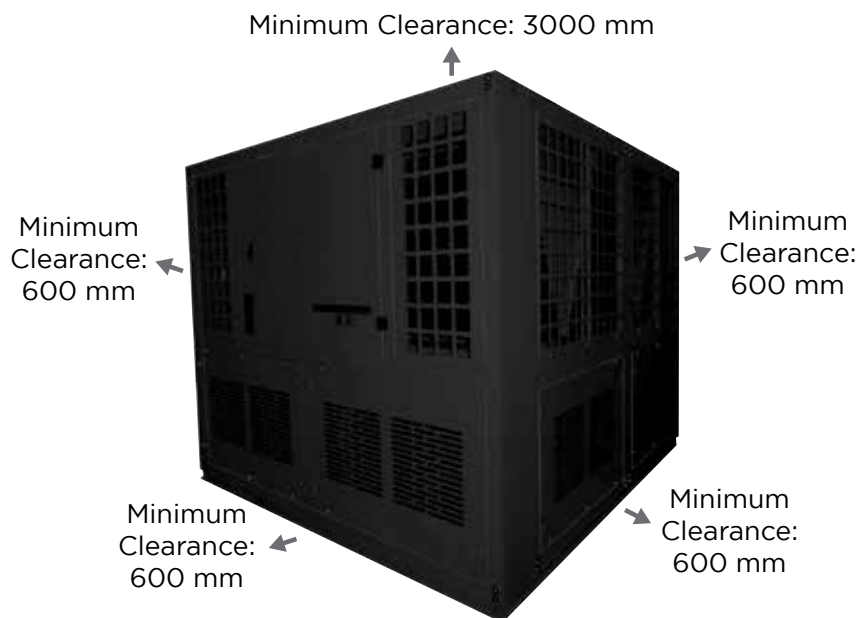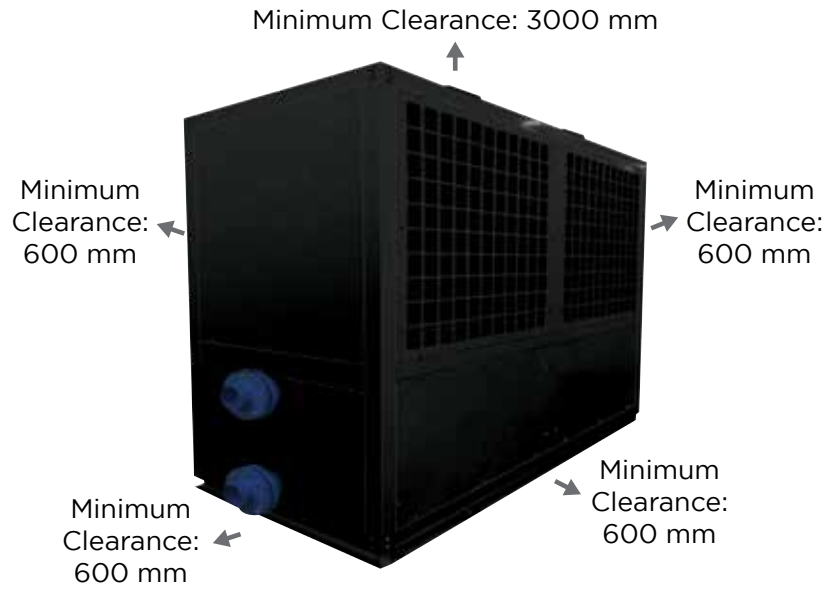

Specifications				
Model			Electroheat PRO 150	Electroheat PRO 250
Air 24°C/Water 27°C (Nominal)	Heating Capacity	kW	150 (511,500 BTU)	250 (852,500 BTU)
	Heating Input	kW	29	49
	COP		5.17	5.10
Air 27°C/Water 27°C	Heating Capacity	kW	157 (537,000 BTU)	262 (895,000 BTU)
	Heating Input	kW	29	50
	COP		5.41	5.24
Air 15°C/Water 27°C	Heating Capacity	kW	112 (384,500 BTU)	191 (652,500 BTU)
	Heating Input	kW	27	47
	COP		4.14	4.06
Air -5°C/Water 27°C	Heating Capacity	kW	66 (225,500 BTU)	110 (375,500 BTU)
	Heating Input	kW	23	39
	COP		2.86	2.82
Air -15°C/Water 27°C	Heating Capacity	kW	45 (153,000 BTU)	75 (255,500 BTU)
	Heating Input	kW	20	35
	COP		2.25	2.14
Air 35°C/Water 27°C	Cooling Capacity	kW	74 (255,500 BTU)	122 (418,000 BTU)
	Cooling Input	kW	31	47
	COP		2.38	2.59
Max. Current		A	80	132
Power Supply		V/Ph/Hz	380-415V/3Ph/50Hz	380-415V/3Ph/50Hz
Compressor	Type		Scroll	Scroll
	Quantity	pcs	2	4
	Capacity	kW	44	37
Refrigerant Type	Type		R410a	R410a
	Quantity	kg	6.5 × 2	5.5 × 4
Evaporator	Type		Hydrophilic aluminium/ φ9.52 inner groove tube	Hydrophilic aluminium/ φ9.52 inner groove tube
	Number of rows		3	2
	Fin spacing	mm	1.8	1.8
Fan motor	Speed		2-speed	2-speed
	Quantity	pcs	2	4
Water Flow Switch			Built-in	Built-in
Controller			Multi System Controller with Large LCD Monitor	Multi System Controller with Large LCD Monitor
Noise		dB(A)	60	65
Water Connection		mm	90 (Metric)	110 (Metric)
Water Flow Rate	Minimum	L/h	25,800	43,000
	Maximum	L/h	65,000	110,000
Dimension	L-W-H	mm	2000-980-1970	2000-2160-2000
Weight	Net Weight	kg	600	1,020

Warranty

Heat Pump Parts	Domestic	Commercial
Compressor	3 years	1 year
Titanium Heat Exchanger	10 years	1 year
All other components	2 years	1 year

WATERCO

water, the liquid of life

Waterco pioneers reliable solutions for healthy, safe water environments, which are used in residential, commercial and industrial applications in over 40 countries.

Established in 1981, it has since become a global brand recognised for designing and manufacturing filtration and sanitisation innovations for the swimming pool, spa, aquaculture, and water purification sectors.



CONTACT WATERCO

Waterco's head office is situated in Sydney, Australia with international offices, manufacturing plants and warehouses located in Australia, New Zealand, Malaysia, Indonesia, Singapore, China, the US, Canada, and the UK.

OFFICES - AUSTRALIA

NSW - Sydney (Head Office)
Tel: +61 2 9898 8600
QLD - Brisbane
Tel: +61 7 3299 9900
VIC/TAS - Melbourne
Tel: +61 3 9764 1211
WA - Perth
Tel: +61 8 9273 1900
SA/NT - Adelaide
Tel: +61 8 8244 6000
ACT Distribution
Tel: +61 2 6280 6476

OFFICES - OVERSEAS

Waterco (Europe) Limited
Sittingbourne, Kent, UK
Tel: +44 (0) 1795 521 733

Waterco (USA) Inc
Augusta, Georgia, USA
Tel: +1 706 793 7291

Waterco Canada
Boucherville, Quebec, Canada
Tel: +1 450 748 1421

Waterco (NZ) Limited
Auckland, New Zealand
Tel: +64 9 525 7570

Waterco (C) Limited
Guangzhou, China
Tel: +86 20 3222 2180

Waterco (Far East) Sdn Bhd
Selangor, Malaysia
Tel: +60 3 6145 6000

PT Waterco Indonesia
Jakarta, Indonesia
Tel: +62 21 4585 1481

Waterco Singapore Intl Pte Ltd
Nehsons Building, Singapore
Tel: +65 6344 2378

DISTRIBUTED BY:

